Instructions for printable door opener Description



The door openers are used to open and close doors with the elbow. This is intended to minimize the spread of corona viruses via door handles.

Grundsätzlich sollen während der Coronavirus-Pandemie alle Türen in den Unternehmen geöffnet bleiben und verkeilt werden. Nur bei Türen, die aus sicherheitstechnischen, hygienischen oder durch den Betriebsablauf bedingten Gründen nicht geöffnet bleiben dürfen, sollen Türöffner-Hilfen eingesetzt werden.

Generally, all doors in companies should remain open during the coronavirus pandemic. Door opener should only be used for doors that may not remain open for safety, hygiene or other individual reasons.

The door openers are not intended as permanent installations, but only for the time of the pandemic.



Types of door opener



here are 4 different door opener solutions:

- Version SMALL 21 mm = Suitable for office or medium-heavy doors. Door handle diameter up to 21 mm.
- Version SMALL 25 mm = Suitable for office or medium-heavy doors. Door handle diameter up to 25 mm.
- Version LARGE 21 mm = Suitable for medium or heavy doors. Door handle diameter up to 21 mm.
- Version LARGE 25 mm = Suitable for medium or heavy doors. Door handle diameter up to 25 mm.

Instructions for printable door opener Determining the correct door opener help


To determine the correct size of the door opener, the door handle diameter must be measured.





Construction of door opener SMALL

The door opener set contains two plastic parts, which are connected with 4 x M4 screws.

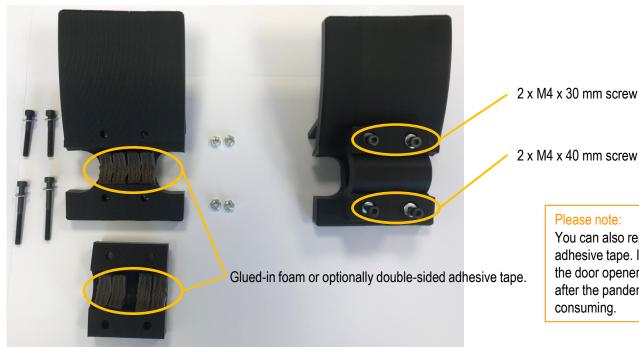



Required screws:


- 2 x M4 x 30 mm screw
- 2 x M4 x 40 mm screw
- 4 x M4 screw nut
- 4 x Washer M4, outside diameter 8,8 mm

Please note:

You can also replace the glued-in foam with double-sided adhesive tape. In this way you achieve an even tighter fit of the door opener. Removing the double-sided adhesive tape after the pandemic period is considerably more timeconsuming.

Construction of door opener LARGE

The door opener set contains two plastic parts, which are connected with 4 x M4 screws.

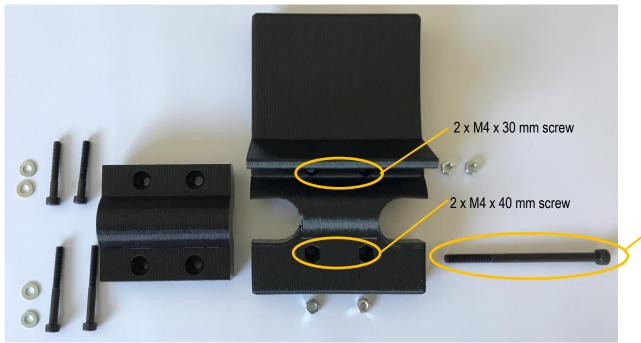



Required screws:

- 2 x M4 x 30 mm screw
- 2 x M4 x 40 mm screw
- 4 x M4 screw nut
- 4 x Washer M4, outside diameter 8,8 mm
- 1 x M5 x 80 mm

The large door openers have an integrated M5 x 80 mm screw for reinforcement.

Installation

The door openers are attached like this:







Installation



The screws of the door opener should be tightened crosswise. Please make sure that the construction is tight.

